
F235.90 max pull 90 kN

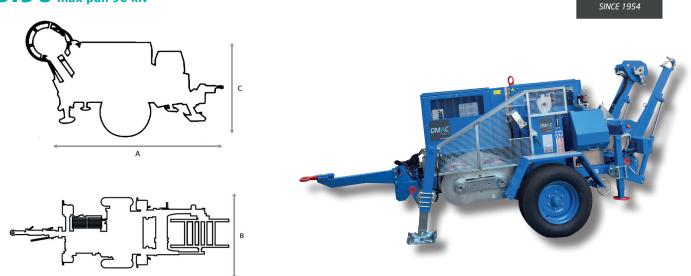

Hydraulic puller fit to pull one rope in stringing operations of overhead transmission lines. One hydraulic circuit allows to continuously vary the speed in both directions by operating one control device.

- One pair of multi-grooved steel capstans fit for stringing one steel rope.
- Machine control panel equipped with built-in electronic instrument featuring a large graphic color display and a USB port. Main functions include display of pull-force, speed and length of cable in real time, max pull force setting, display of working hours, data recording and storage on a pen-drive (data processing software provided).
- Device for pull force setting which allows to maintain the pre-set force even at speed "0".
- Safety negative hydraulic brake.
- Chassis with rigid axle, manual brake and detachable drawbar for towing at low speed in job-site.
- Hydraulic back stabilisers and manual front stabilisers.
- Attachments for anchorage and for lifting.
- Heat exchanger to cool the oil in the hydraulic circuit.
- Reelwinder fit for a 1600-mm-dia reel, with automatic ropewinder.

OPTIONAL DEVICES

- 008 Axle with leaf spring suspensions, drawbar, pneumatic braking system, tires and lights for towing on the road (without homologation).
- 006.1 Lights for towing on the road.
- 006.2 Pneumatic braking system.
- 028.7 Device to start the diesel engine and the hydraulic circuit at low temperatures (up to -30° C).
- 037 Remote control by cable, with 10 m of cable.
- 038 Radio-control (max distance 50 m).
- 045.2 Automatic clamp for rope.
- 045.3 Manual clamp for rope.
- 047 Hydraulic front stabilisers.
- 069.5 Printer with accessories, complete with case.
- 084 Bigger reelwinder fit for a 1900-mm-dia reel.
- 115 Setting-up for pulling 2 ropes simultaneously.
- 014 Second reel-winder, ideal to complete the opt. 115.

| FEATURES | |
|--|--|
| Capstans | 2 x Ø 450 mm |
| Grooves on the | |
| capstans | 9 + 9 |
| Max rope diameter | 20 mm |
| Max joint diameter | 60 mm |
| Dimensions AxBxC | 3,70x2,15x2,10 m |
| Weight | |
| (without rope) | 3900 kg |
| ENGINE | |
| | |
| Feeding | diesel |
| Feeding Power | diesel 156 hp / 115 kW |
| 5 | 0.000 |
| Power | 156 hp / 115 kW |
| Power Cooling | 156 hp / 115 kW water 12 V |
| Power Cooling Electric plant | 156 hp / 115 kW water 12 V |
| Power Cooling Electric plant PULL PERFORMANC | 156 hp / 115 kW water 12 V CES |
| Power Cooling Electric plant PULL PERFORMAN Max pull | 156 hp / 115 kW water 12 V CES 90 kN |
| Power Cooling Electric plant PULL PERFORMAN Max pull Speed at max pull | 156 hp / 115 kW water 12 V CES 90 kN 2,5 km/h |

tel. +39 035 838 092 fax +39 035 839 323 omac@omac-italy.it Performances of the machine without optional devices, at sea level and temperature 20°C. Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.