


F375.240_{max pull 240 kN}

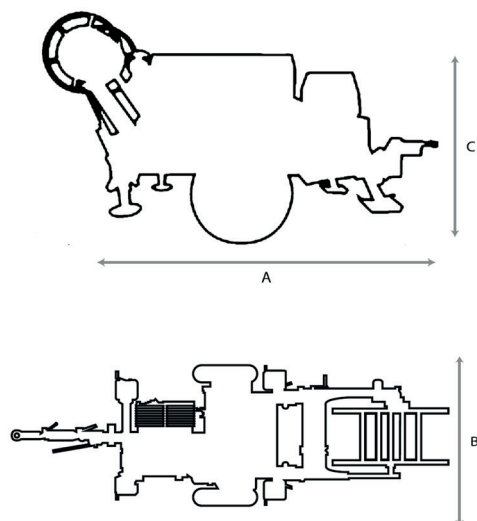

Hydraulic puller fit to pull one rope in stringing operations of overhead transmission lines. One hydraulic circuit allows to continuously vary the speed in both directions by operating one control device.

- One pair of multi-grooved steel capstans fit for stringing one steel rope.
- Machine control panel equipped with built-in electronic instrument featuring a large graphic color display and a USB port. Main functions include display of pull-force, speed and length of cable in real time, max pull force setting, display of working hours, data recording and storage on a pen-drive (data processing software provided).
- Device for pull force setting which allows to maintain the pre-set force even at speed "0".
- Safety negative hydraulic brake.
- Chassis with rigid axle, manual brake and detachable drawbar for towing at low speed in job-site.
- Hydraulic back and front stabilisers.
- Attachments for anchoring and for lifting.
- Heat exchanger to cool the oil in the hydraulic circuit.
- Reelwinder fit for a 1900-mm-dia reel, with automatic ropewinder.

OPTIONAL DEVICES

- 005.1 Chassis with tandem axle, drawbar, suspensions, air braking system, tires and lights for towing on the road (homologation excluded).
- 008 Axle with leaf spring suspensions, drawbar, pneumatic braking system, tires and lights for towing on the road (without homologation).
- 006.1 Lights for towing on the road.
- 006.2 Pneumatic braking system.
- 028.7 Device to start the diesel engine and the hydraulic circuit at low temperatures (up to -30°C).
- 037 Remote control by cable, with 10 m of cable.
- 038 Radio-control (max distance 50 m).
- 045.2 Automatic clamp for rope.
- 045.3 Manual clamp for rope.
- 069.5 Printer with accessories, complete with case.
- 084 Bigger reelwinder fit for a 2250-mm-dia reel.
- 115 Setting-up for pulling 2 ropes simultaneously.
- 014 Second reel-winder, ideal to complete the opt. 115.

FEATURES

Capstans	2 x Ø 800 mm
Grooves on the capstans	12 + 12
Max rope diameter	32 mm
Max joint diameter	80 mm
Dimensions AxBxC	5,10x2,50x3,00 m
Weight (without rope)	9500 kg

ENGINE

Feeding	diesel
Power	380 hp / 280 kW
Cooling	water
Electric plant	24 V

PULL PERFORMANCES

Max pull	240 kN
Speed at max pull	2,5 km/h
Max speed	5 km/h
Pull at max speed	130 kN